


Mini Digital Clamp Tester

AC Current ,20A/200A ,33mm ϕ CT

Model 220 (CE)

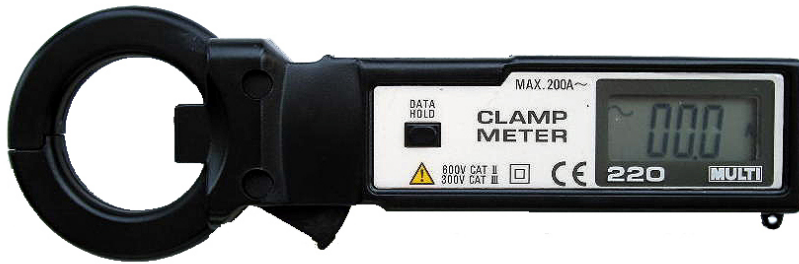

FEATURES

- 33mm ϕ CT window and ultra compact size.
- Data-hold function. Especially useful when working in dark or hard to get areas.
- Conform to IEC safety requirements.

SPECIFICATIONS

| | |
|------------------|---|
| Safety standard | : IEC 61010-1, IEC 61010-2-032 ,Installation Category II 600V or Category III 300V. |
| E.M.C. standard | : EN 61326. |
| Measuring method | : Dual slope integration mode |
| Display | : 3.5 digit LCD, max. reading of 1999 |
| Range | : AC 0~20A/200A |

Accuracy 23°C ± 5°C 80%RH or less (50/60Hz)

| Range | Resolution | Accuracy |
|---------|------------|--------------------|
| AC 20A | 10mA | ± 1.2% rdg ± 5 dgt |
| AC 200A | 100mA | ± 1.2% rdg ± 5 dgt |

| | |
|------------------------|---|
| Jaw opening capability | : 33mm φ |
| Over range indication | : Blanking of all digits except MSD 1 |
| Low battery indication | : "B" mark on LCD |
| Data hold indication | : "DH" mark on LCD |
| Sampling | : 2 times/sec. |
| Withstanding voltage | : AC 3700V 1 minute max. (Between the core of CT and outer case) |
| Operating temperature | : 0°C to 40°C, 80%RH max. (Without condensation) |
| Storage temperature | : -10°C to 60°C, 70%RH max. (Without condensation) |
| Power supply | : 1.55V (SR-44, LR-44) × 2 |
| Power consumption | : 3mW |
| Battery life | : SR-44 (200 hours), LR-44 (100 hours) |
| Size | : 54(W) × 167(H) × 23(D)mm |
| Weight | : Approx. 100g |
| Accessories | : Soft case.....1 Instruction manual.....1 Batteries LR-44(1.55V).....2 |